


EROS

ADJUSTABLE

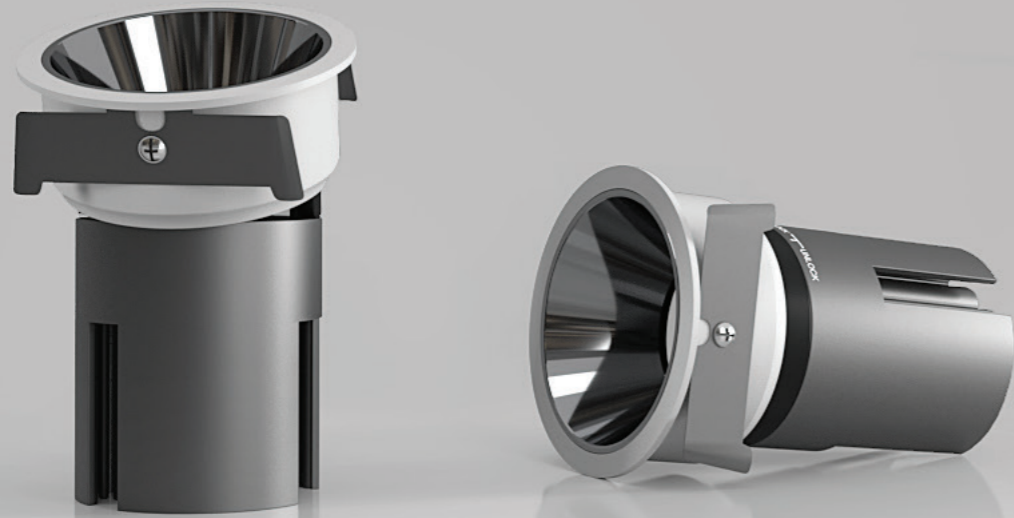

Model	Power	Luminous flux	Dimensions	Cut-out	Input	Chip led
E7510C	10w	700lm	Ø90*103mm	Ø75mm	200-240V	Cree/Bridgelux
E7512C	12w	900lm	Ø90*103mm	Ø75mm	200-240V	Cree/Bridgelux
E9515C	15w	1150lm	Ø110*120mm	Ø95mm	200-240V	Cree/Bridgelux
E9520C	20w	1500lm	Ø110*120mm	Ø95mm	200-240V	Cree/Bridgelux

TRIAC Dimming
0-10V Dimming
DALI Dimming
No Flicker
CRF 95
IP44
3000K
4000K
15°
24°
36°
24°
35°

