




Model	Power	Luminous flux	Dimensions	Cut-out	Input	Chip led
V6510F	10w	750lm	Ø72*69mm	Ø65mm	200-240V	Cree/Bridgelux
V6515F	15w	1150lm	Ø88*71mm	Ø80mm	200-240V	Cree/Bridgelux

TRIAC Dimming	0-10V Dimming	DALI Dimming	No Flicker	CRI > 90	< 3 SDCM	IP20	3000K	4000K	15°	24°	36°
---------------	---------------	--------------	------------	----------	----------	------	-------	-------	-----	-----	-----

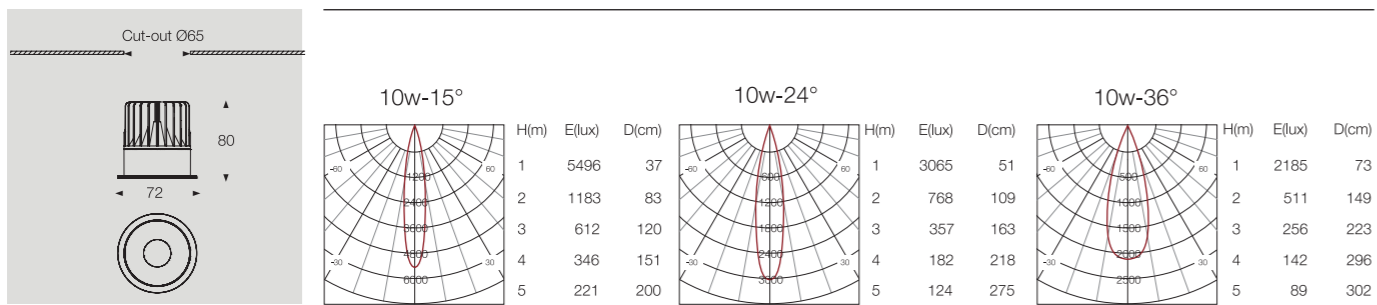

Secondary Reflector




White

Chrome



Model	Power	Luminous flux	Dimensions	Cut-out	Input	Chip led
V6510A	10w	750lm	Ø72*78mm	Ø65mm	200-240V	Cree/Bridgelux
V6515A	15w	1150lm	Ø88*88mm	Ø80mm	200-240V	Cree/Bridgelux

TRIAC Dimming	0-10V Dimming	DALI Dimming	No Flicker	CRI > 90	< 3 SDCM	IP20	3000K	4000K	15°	24°	36°	24°
---------------	---------------	--------------	------------	----------	----------	------	-------	-------	-----	-----	-----	-----

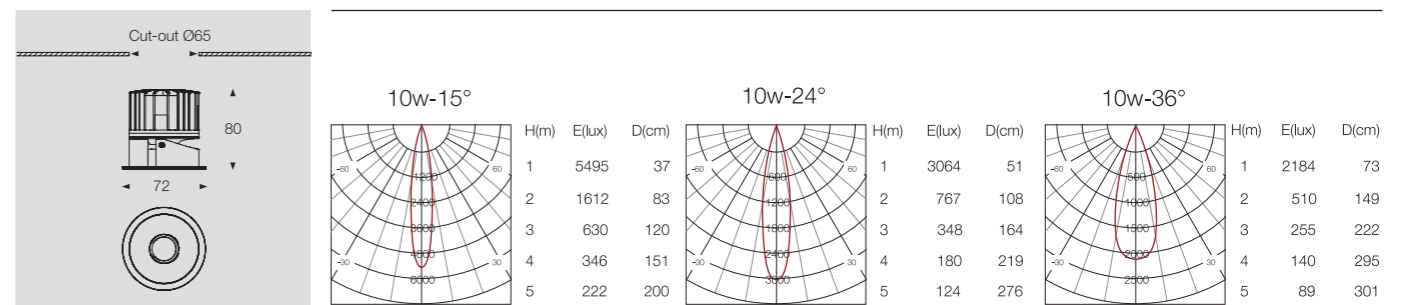

Secondary Reflector



White

Chrome